SUBJECT: PIGGYBACK CLAY COUNTY RFP #13/14-8 FOR VARIOUS EQUIPMENT & AMENITIES FOR PARKS & PLAYGROUNDS

BID #: PSC-0603-14 **OPEN DATE: 01/07/2014**

GENERAL GOVERNMENT AWARDS COMMITTEE

KIND AND BASIS OF CONTRACT: PIGGYBACK CONTRACT – INITIAL TERM OF THREE (3) YEARS BEGINNING JANUARY 29, 2014 AND ENDING FEBRUARY 11, 2017

AGENCY: PARKS, RECREATION AND COMMUNITY SERVICES DEPARTMENT

BASIS OF AWARD: PIGGYBACK

NUMBER OF BIDS INVITED: (N/A) **NUMBER RECEIVED:** (N/A) **OTHER** (N/A)

SUMMARY OF BIDS AND RECOMMENDED ACTIONS:
Recommend approval to award to the below vendors under this piggyback contract, for equipment and amenities for parks and playgrounds. The total award amount not to exceed $192,413.00, and a total revised maximum indebtedness not to exceed $2,161,937.28.

Southern Recreation, Inc. – Tom Marshall Park - $99,993.00
Bliss Products and Services – San Mateo Little League Park - $92,420.00

Funding for this award to be encumbered by various CIP accounts, to be executed by Contract amendment through the Office of General Counsel.

ATTACHMENTS: Recommendation Memo; Vendor Quotes; Original RFP Discounts; Previous Awards

ANALYST: _____ CHELSEY FLEMING **RESPECTFULLY SUBMITTED** _____ GREGORY PEASE, CHIEF PROCUREMENT DIVISION

CONCURRENCE BY: Daryl Joseph, Director of Parks, Recreation & Community Services

---

(ALL AWARD ACTIONS SUBJECT TO LAWFULLY APPROPRIATED FUNDS)
ACTION OF GGAC COMMITTEE ON RECOMMENDATIONS ABOVE
MEMBERS APPROVING _____ MEMBERS DISAPPROVING _____ DATE: _____

_____ _____ OTHER: _____

_____ _____

_____ _____

ACTION OF AWARDING AUTHORITY DATE _____

APPROVED _____ DISAPPROVED _____

OTHER _____

SIGNATURE OF AUTHENTICATION _____

City of Jacksonville, Florida

Daryl Joseph, Director

Parks, Recreation and Community Services Department
214 N Hogan Street, 4th Floor
Jacksonville, FL 32202
(904) 255-7919
www.coj.net

ONE CITY. ONE JACKSONVILLE.

May 9, 2017

MEMORANDUM

TO: Greg Pease, Chief
Procurement Division

FROM: Daryl Joseph, Director
Parks, Recreation and Community Services Department

RE: **Request to Piggyback Clay county Bid #13/14-8 Various Equipment & Amenities for Parks and Playgrounds**

The Clay County Florida Bid #13/14-8 for "Various Equipment & Amenities for Parks and Playgrounds" was competitively bid and awarded to multiple companies for the initial term of three years from January 29, 2014 to February 11th, 2017. The award has been renewed for one year from February 12th, 2017 to February 11th, 2018.

The Parks, Recreation and Community Services Department requests approval to piggyback service under the Clay County Florida Bid #13/14-8.

Southern Recreation, Inc.	Tom Marshall Park	$99,993.00
Bliss Products and Services, Inc.	San Mateo Little League Park	$92,420.00

Southern Recreation and Bliss Products and Services have current contracts for the scope of services in question with a public entity, Clay County Bid #13/14-8 which the contract was competitively procured. The terms and conditions of the contracts are realized in the scope provided by the distributor.

The department has reviewed for compliance the referenced project. We respectfully request and recommend award of the following park to the distributor for the playground equipment at the playground as listed. The purchases will be made via purchase order.

Total funding for this project should be encumbered as follows:

Park	Distributor	Account No	Estimated Amount
Tom Marshall Park	Southern Recreation	Various CIP accounts	$99,993.00
San Mateo Little League Park	Bliss Products and Services	Various CIP accounts	$92,420.00

Attachment: PSC-0603-14

cc: Claire Stine, Financial Manager
Chelsey Fleming, Purchasing Analyst

Bliss Products and Services, Inc
6831 S. Sweetwater Rd.
Lithia Springs, GA 30122
(800) 248-2547
(770) 920-1915 Fax

Quote # **39008**

Sales Rep: DeWitt Gibbs
dewitt@blissproducts.com
O: (904) 751-0830
F: (904) 714-6822
C: (904) 219-7760

City Of Jacksonville - Parks & Recreation

Date 2/7/2017

Project San Mateo Little League Playground 2 w Shade

Bill To
City Of Jacksonville - Parks & Recreation
117 W. Duval Street, Suite 375
Jacksonville, FL, 32202
T: (904) 255-8823

Ship To
Ship to Jacksonville Terminal for Dock Pick Up
Contact DeWitt Gibbs 904-219-7760

Contact
Jill Enz
Park Development and Natural Resources Manager
Phone: (904) 255-7941

Approximate Ship Date

Ship Via

Terms
Net 30

Vendor	Part #	Description	Qty	Unit Price	Extended Price
SND		Site Prep to include Excavation, Demo of existing Concrete Sidewalks & Removal of 12" depth in Play Area. Create a New 5'W Sidewalk & 6"W x 12"D Concrete Curb to contain the Mulch with Accessible Ramp 5'W X 6'L	1	$11,350.00	$11,350.00
SND		Assembly & Installation of Play Equipment	1	$18,200.00	$18,200.00
FCM		Engineered Wood Surfacing	150	$42.00	$6,300.00
PPS	645-106186 C	Custom Super Max Play Unit with Oval Swing with Shade Structure	1	$53,844.00	$53,844.00
PPS	67947	Oval Swing	1	$5,726.00	$5,726.00
PPS		Discount per Clay County Contract Bid 1314-8	1	$-6,500.00	$-6,500.00

Need to see discount break out.
Equip. = 10%
Installation = 35%

Taxable Subtotal

Sub Total	$88,920.00
Freight	3,500.00
Tax	0.00
Grand Total	$92,420.00

Quote valid for 30 days unless otherwise noted.

Installation prices are based on truck access to the site and normal soil conditions. Any buried rock or debris may be cause for additional charges. Any Site preparation or demolition not specified above must be completed prior to

installation of the equipment. Site restoration, unless otherwise noted, is not included. Please refer to your installation agreement for further details. Sales tax if applicable is not included. Sales tax exempt certificate will be required for exemption. All orders are subject to approval and acceptance by the manufacturer.

Complete Terms and Conditions can be found at BlissProducts.com/termsandconditions.html

4/4/2017

San Mateo Little League Playground
Drawing 645-106186A

SuperMax Specifications

General System Specifications:

SuperMax features 5" O.D. uprights with a high-strength aluminum alloy clamp fastening system finished with a polyester powder-coat. All uprights shall receive factory installed aluminum post caps and will ship with labels for manufacturer identification.

All decks and components shall connect using the aluminum alloy clamping system. All climbing attachments shall include a 15" wide deck entry archway to control deck access to one child at a time and help prevent inadvertent falls.

Manufacturer shall offer the following warranties on the materials and components of its system:

- Lifetime limited warranty on support posts (uprights)
- 15-Year limited warranty on punched steel decks, pipes, rails, loops and rungs
- 15-Year limited warranty on rotationally molded polyethylene components
- Lifetime limited warranty on all hardware

Manufacturer shall be ISO 9001/2000 certified

Manufacturer shall show IPEMA certification of compliance for each component that the product conforms with the requirements of ASTM F1487-01.

General Specifications of Materials

Rotationally Molded Plastics
All Rotationally Molded Products are manufactured from linear low-density polyethylene UV-stabilized color and an anti-static compound additive. The tensile strength of this material is to be 2500 PSI as defined by ASTM D638. The typical wall thickness will be .250" (¼"). All rotationally molded products shall meet or exceed the following specifications: ASTM D-1248, type 2, class A and Federal specification LP-390C, type 1, class M, grade 2, category 3; Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790); Heat Distortion (ASTM-648); Low Temperature Impact (ARM-STD). All solid plastic panels are manufactured from high-density polyethylene. All solid plastic panels shall meet or exceed the following specifications: Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790).

Polyester Powder-Coating Process
Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a six stage bath system with an iron phosphate wash, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees

Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 100% at 400 degrees Fahrenheit.

Hardware
All nuts, bolts, and washers, with exceptions noted, shall be 3/8" diameter 18-8 stainless steel in varying lengths, with a vandal-resistant hex-pinned head configuration and factory-applied locking patch. When allowed a 72-hour cure time, the locking patch will prevent the bolt from loosening without at least 4 times the installation torque. Play & Park Structures will supply the special tool required to turn vandal-resistant hardware with each shipment. 1/2" diameter Ramp and Arch Bridge connecting hardware shall be Grade 5 zinc-plated, and 3/8" Clatter Bridge security bolts shall be Grade 8 hardened and zinc-plated.

Plastisol Coating
All metal deck platforms, steps, bridge planks, ramps, kickplates, and chains are plastisol-coated. Each part is chemically washed and completely submerged in a special heat-activated primer and allowed to dry. Parts are then pre-heated and immersed in liquid poly-vinyl-chloride (plastisol). The PVC coating shall have a typical thickness of .080" to .120", and a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. Standard color is brown, with optional colors available. The following characteristics apply:

Tensile Strength - 2,800 psi
Elongation - 290 %
Tear Strength - 420 lbs/in

Uprights, Aluminum
The posts shall be 5"outside diameter tubing with an 1/8" minimum wall thickness. The material shall be extruded from 6005-T5 seamless aluminum alloy conforming to ASTM-B-221. Minimum yield strength shall be 35,000 psi and minimum tensile strength shall be 38,000 psi. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

SuperMax Clamp
Clamp Ring and Adapters are die cast from an A380 high-strength aluminum alloy with a baked-on polyester powder-coat finish.

HDPE Components

HDPE Panels
Panels shall be precision cut from a single solid sheet of .750" thick UV-stabilized extruded high-density polyethylene with colors molded in. The material will have a density of 60 lbs/ft^3 and a tensile strength of 4400 PSI (30 Mpa) as determined per procedure C of ASTM D1928. All edges shall have radiuses and all corners rounded for safe play.

Metal Components

Single Seat
The Single Seat shall consist of a 13 ½" Dia. cast aluminum seat mounted to a 1.66" OD x .083" (14 gauge) pipe (seat arm) via ½" set screw. It shall be coated with a custom formula of TGIC polyester powder, after fabrication in conformance with the specifications outlined herein. The seat arm is connected to an upright with a welded mounting tab and upright clamp.

Rotomolded Components

Curvy Canopy
Roof shall be a single piece rotationally molded from an extremely durable low-density polyethylene with ultraviolet (UV) light stabilizers and color molded in. This material complies with ASTM-D-1248, Type 2, Class A, and Federal Specification LP-390C, Type 1, Class M, Grade 2, Category 3, and has a minimum 3/16" wall thickness.

Hurricane Slide
The Extension Platform is fabricated from pre-punched steel sheet 11-gauge thickness with steel flat support bars welded underneath to increase strength. After welding, the entire platform is Plastisol-coated with a thickness of 80 mils min. on top wear surface. Exit Support Bracket is made from 1.315" O.D. 14-gauge galvanized steel tubing welded to 11-gauge steel plate and coated with a baked on polyester powder-coated finish. The one-piece Hurricane Spiral Slide shall be a double wall, one-piece construction of color impregnated rotationally molded linear low-density polyethylene with a 1/4" nominal wall thickness. The slide mast shall be aluminum and permanently molded into the slide during the molding process. The slide shall include a ground socket to receive the mast. Wall Panels are cut from a single sheet of high-density .850" thick extruded solid polyethylene with color molded in and UV-stabilized.

Double Slides - Roto-Molded
Slide foot buck is fabricated from 2 3/8" O.D. galvanized steel tubing and 12 gauge stainless steel plate. Cross Bar is fabricated from 1 5/16" O.D. 14-gauge galvanized tubing. Barrier assembly is fabricated from 1 5/16" O.D. 14-gauge galvanized tubing and 1 1/4" O.D. galvanized end cap. Collar Plate is fabricated from 1/8" sheet steel and 2 1/8" O.D. steel collar. All metal parts shall be coated with a custom formula TGIC polyester powder coating. Slide sections and Visor Hood shall be rotationally molded from an extremely durable double-walled low density polyethylene with (UV) light stabilizers and color molded in. This material complies with ASTM-D-1248, Type 2, Class A, and Federal specification LP-390C, Type 1, Class M, Grade2< Category 3, and has a minimum 1/4" wall thickness (3/16" for Visor Hood). Steel inserts are molded in to receive fastening bolts. Slide side rails are a minimum 12" high from the inside slide surface, and slide bed-way is designed to have a 20" minimum width.

Avalanche & Landslide Slides
Footbuck:

Shall be 1 5/16" O.D. 14-gauge galvanized steel tubing and 12GA. (.109") Sheet metal P & O. All parts are all welded construction with a baked on polyester powder-coated finish after fabrication.

SLIDE SECTIONS:
All Rotationally Molded Products are manufactured from linear low-density polyethylene UV-stabilized color and an anti-static compound additive. The tensile strength of this material is to be 2500 PSI as defined by ASTM D638. The typical wall thickness will be .250" (¼"). All rotationally molded products shall meet or exceed the following specifications: ASTM D-1248, type 2, class A and Federal specification LP-390C, type 1, class M, grade 2, category 3; Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790); Heat Distortion (ASTM-648); Low Temperature Impact

(ARM-STD). All solid plastic panels are manufactured from high-density polyethylene. All solid plastic panels shall meet or exceed the following specifications: Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790).

Slide Support:
Support Plate shall be made of 12 GA. H.R. Steel, sheet sheared into 11 ¼" Wide strips. Footbuck pipe shall be made of 2" L.W. GALV. PIPE, 41 11/16" LG. All parts are all welded construction with a baked on polyester powder-coated finish after fabrication.

Hardware:
All nuts, bolts, screws, inserts, and lock washers used in the assembly of all play equipment shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 304 alloy stainless steel. Fasteners with yellow dichromate treatment have an electro-deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing. Stainless steel fasteners hall be button pin-in head, hex socket cap screws with a two-part epoxy locking patch added to the threads. The two-part locking patch shall consist of one part resin and one part catalyst which are activated during installation. After curing, the material shall require a minimum of five times the installation torque to remove the fastener. Manufacturer shall provide special installation tools for pinned fasteners.

Deck Components

Deck Platforms
Metal decks shall be a one-piece construction and shall be designed to maintain a full 48" on center post spacing. Metal decks shall be fabricated from 11 gauge hot rolled steel which shall be punched, formed, and reinforced with welded in place 2-1/2" x 11 ga. steel strips. Decks shall include a pattern of equally spaced slots on each side to provide a flush mounting of play events that attach to the deck, as well as the design of more than one adjacent deck at the same height. Each deck shall have welded at the corner underside a threaded 3/8" stud for attachment to the post's Deck Clamps. This fastening technique eliminates the need for hardware protruding through the deck surface, thereby eliminating the possibility of an entanglement hazard and presenting a clean and smooth deck surface. Entire deck assembly, after fabrication, shall be dipped in a textured skid-resistant poly-vinyl-chloride (plastisol) coating to a minimum thickness of .080".

Kickplates
Kickplate is cut from galvanneal sheet metal with (8) 7/16" x 1" slotted holes punched to coincide with deck flange holes. Corners are rounded, edges are ground smooth, and receives a baked-on polyester powder-coated finish after fabrication.

Trestle Bridge
Entry Archway shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing with vertical rungs fabricated from 1-1/16" O.D. x 15 gauge (.075" thick) galvanized steel tubing. L-Fitting is fabricated from 3/16" thick stainless steel for attachment to clamp. The Entry Archway shall be an all-welded assembly and shall be coated after fabrication with a custom formula of TGIC polyester powder coating.

The Trestle Bridge is fabricated from pre-punched steel sheet 12-gauge thick with steel flat support bars welded underneath to increase strength. After welding, the entire platform is Plastisol coated, with a thickness of 80 mils minimum. Average perforation size is 3/16" diameter after coating. Ramp guardrails are fabricated from 1-5/16" O.D. 14-gauge galvanized steel tubing with 'L' fittings stainless steel welded for attachment. Each entire Guardrail receives a baked-on polyester powder-coated finish.

Triangle Transfer with Handhold
Triangle Transfer with Handhold
The Triangle Transfer shall be made from 12 gauge punched steel with a protective p&o finish in conformance with the specifications outlined herein. The Triangle Transfer shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. Handhold shall be fabricated from 1 7/8" O.D. x .12" (11gauge) wall and 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. Support legs shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. Handhold and Support Legs shall be all-welded assemblies and shall be coated after fabrication with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein.

Return Step
Return Step
The Return Step shall be made from 12 gauge punched steel with a protective p&o finish in conformance with the specifications outlined herein. The Return Steps shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. Support legs shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. Support Legs shall be all-welded assemblies and shall be coated after fabrication with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein.

April 18, 2017

City of Jacksonville
Parks and Historic Preservation Section
214 N. Hogan St.
Jacksonville, FL 32202

Tom Marshall Park
Jill Enz
255-7941
255-7940 Fax
jenz@coj.net

1ea. SRP PS5-30835-2 Adventure 2-5 Playstructure	
70,683.00 List	60,080.00
1ea. SRP PS3-33384 Adventure 2-5 Playstructure	
16,361.00 List	13,906.00
1ea. SRP Two Section 5" Arch Swing	
Swing to includes two belt seats and two infant seats	
2,564.00. List	2,179.00
1ea. SRP Tea Cup Spinner	
1,706 List	1,450.00
1ea. SRP Surf Rider	
889.00 List	755.00
1ea. SRP Retro Rocker	
792.00 List	673.00
200ea. Yards Cypress Playground Mulch	2,300.00

Sub Total	81,343.00
Tax	Tax Exempt
Freight	1,150.00
*Installation	17,500.00
Total Due	**99,993.00**

***Installation cost includes removing all existing play equipment**

Discount per the Clay County Florida RFP #13/14-8 for "Various Equipment & Amenities for Parks and Playgrounds"

This proposal subject to acceptance within 30 days and is void thereafter.
Authorized signature *Terry Rogers* Terry Rogers, President
Accepted by _____ Date _____

Southern Recreation, Inc.
4060 Edison Avenue
Jacksonville, Florida 32254

Terry@Southernrecreation.com
(O) 904-387-4390 • (F) 904-387-4391
www.southernrecreation.com

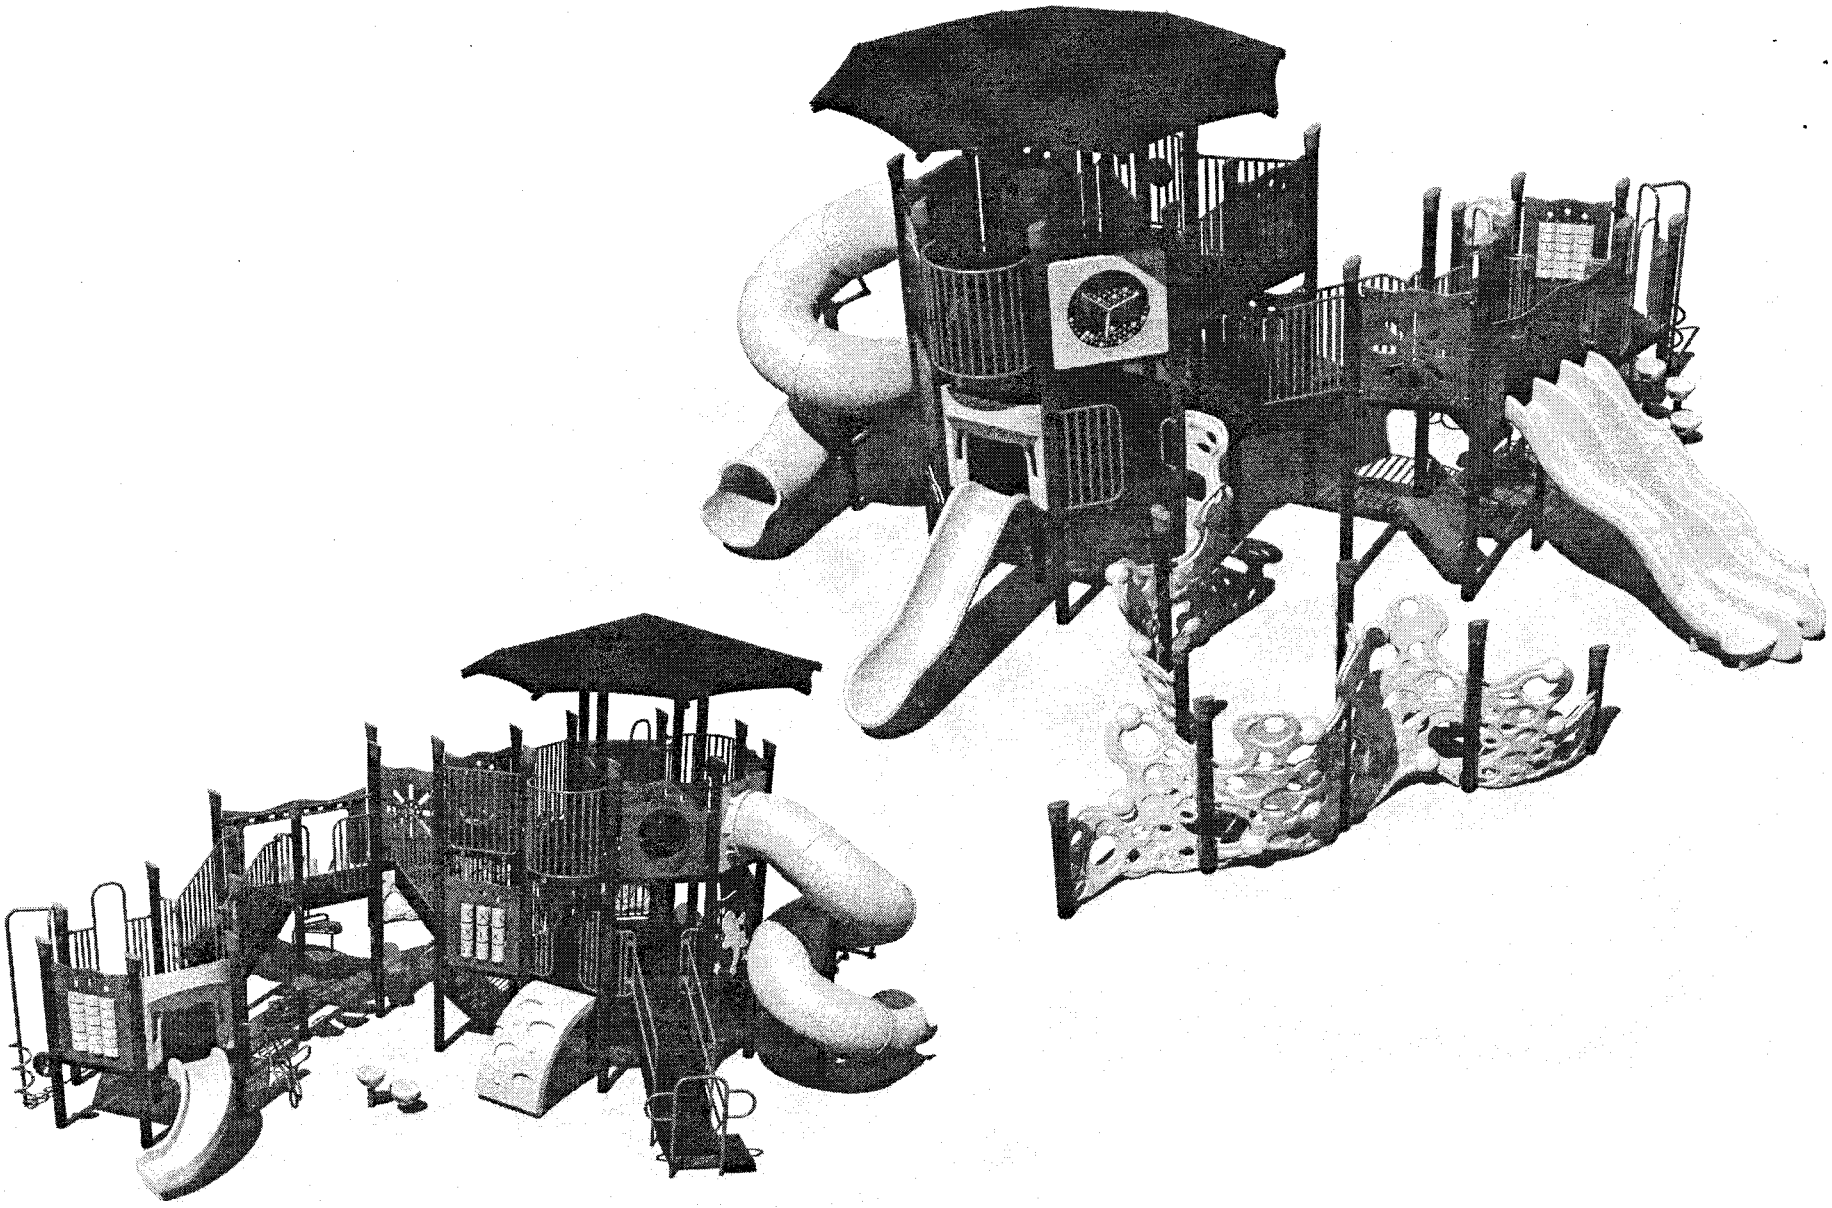

STRUCTURE PS5-30835

Fun Knoxville Playtime (NV Corp (NW) 1/17)

SUPERIOR
RECREATIONAL PRODUCTS
play relax live

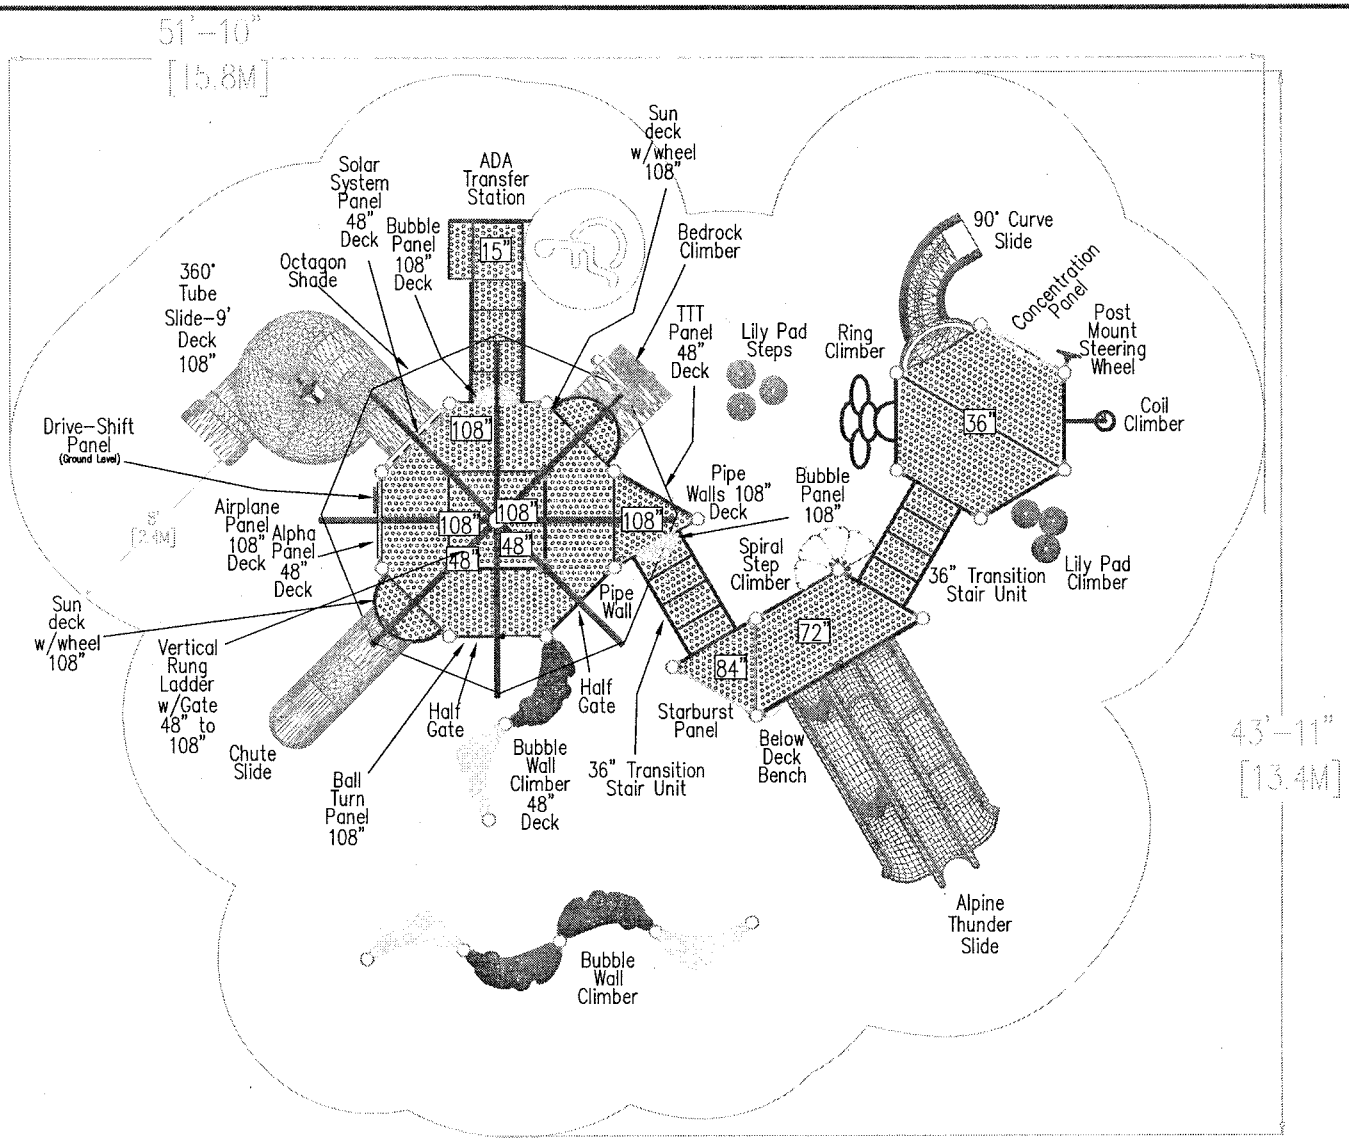

SUPERIOR RECREATIONAL PRODUCTS

Playland

Notes:

1. This play structure design will meet ADA Accessibility Guidelines for Buildings and Facilities, effective March 15, 2012 as published by the Architectural and Transportation Barriers Compliance Board with the addition of 0, ground level play components of 0 different types of play and when installed over accessible surfacing.

2. This site plan should be checked against the actual site area prior to the purchase or installation of equipment.

3. The unit of measure located in the center of the platform indicates the height above the protective surfacing level. The protective surfacing for this design must accommodate a fall height of at least 9 ft. unless otherwise noted.

4. The structure size for this unit is 40 x 32, requiring protective surfacing for an overall use zone of 52 x 44. The approximate surface area is 1694 sq. ft. by ASTM F 1487-07 guidelines.

5. The structure is designed to accommodate 110 children from 5-12 years of age.

6. Supervise Children as they play.

7. To Ensure that accurate measurements are obtained from this site plan, print copies on 11 x 17 paper at full scale.

8. The customers responsibility is to check local soil conditions and drainage within the site. The site must also be surveyed for underground utilities prior to excavation.

9. Completely read your installation manual prior to beginning construction.

10. This design configuration is the property of this firm and Playland Inc. and may not be reproduced or used in any manner without the expressed written consent of this firm and Playland

11. Perimeter Requires 42 Land Scape Timbers ___ Long.

Structure #:	Date:	Drawn By:	Sheet:	Scale:
PS5-30835	8/11/2015	Pat Lee	1 of 3	None

San Mateo Little League Playground
1185 Kraft Road
Jacksonville, FL 32218

Bliss Products & Services

This play equipment is recommended for children ages: 5-12

Minimum Area Required: Per Site

Scale: 3/16" =- 1'-0"
This drawing can be scaled only when in an 11" x 17" format

Drawn By: J. Swiecichowski
Date: 4/5/2017
Quote Number: 645-106186B

play&park structures
401 Chestnut St., Ste. 410
Chattanooga, TN 37402
800-727-1907 / www.playandpark.com

Total Play Components	12			User Capacity
Elevated Play Components	9			45-55
Elevated Play Components Accessible by Ramp	0	Req.	0	Critical Fall Height
Elevated Components Accessible by Transfer	9	Req.	5	8'-0"
Accessible Ground Level Components Shown	3	Req.	3	
Different Types of Ground Level Components	3	Req.	3	

SUPERNOVA PLAY SYSTEMS

ISO 9001 CERTIFIED

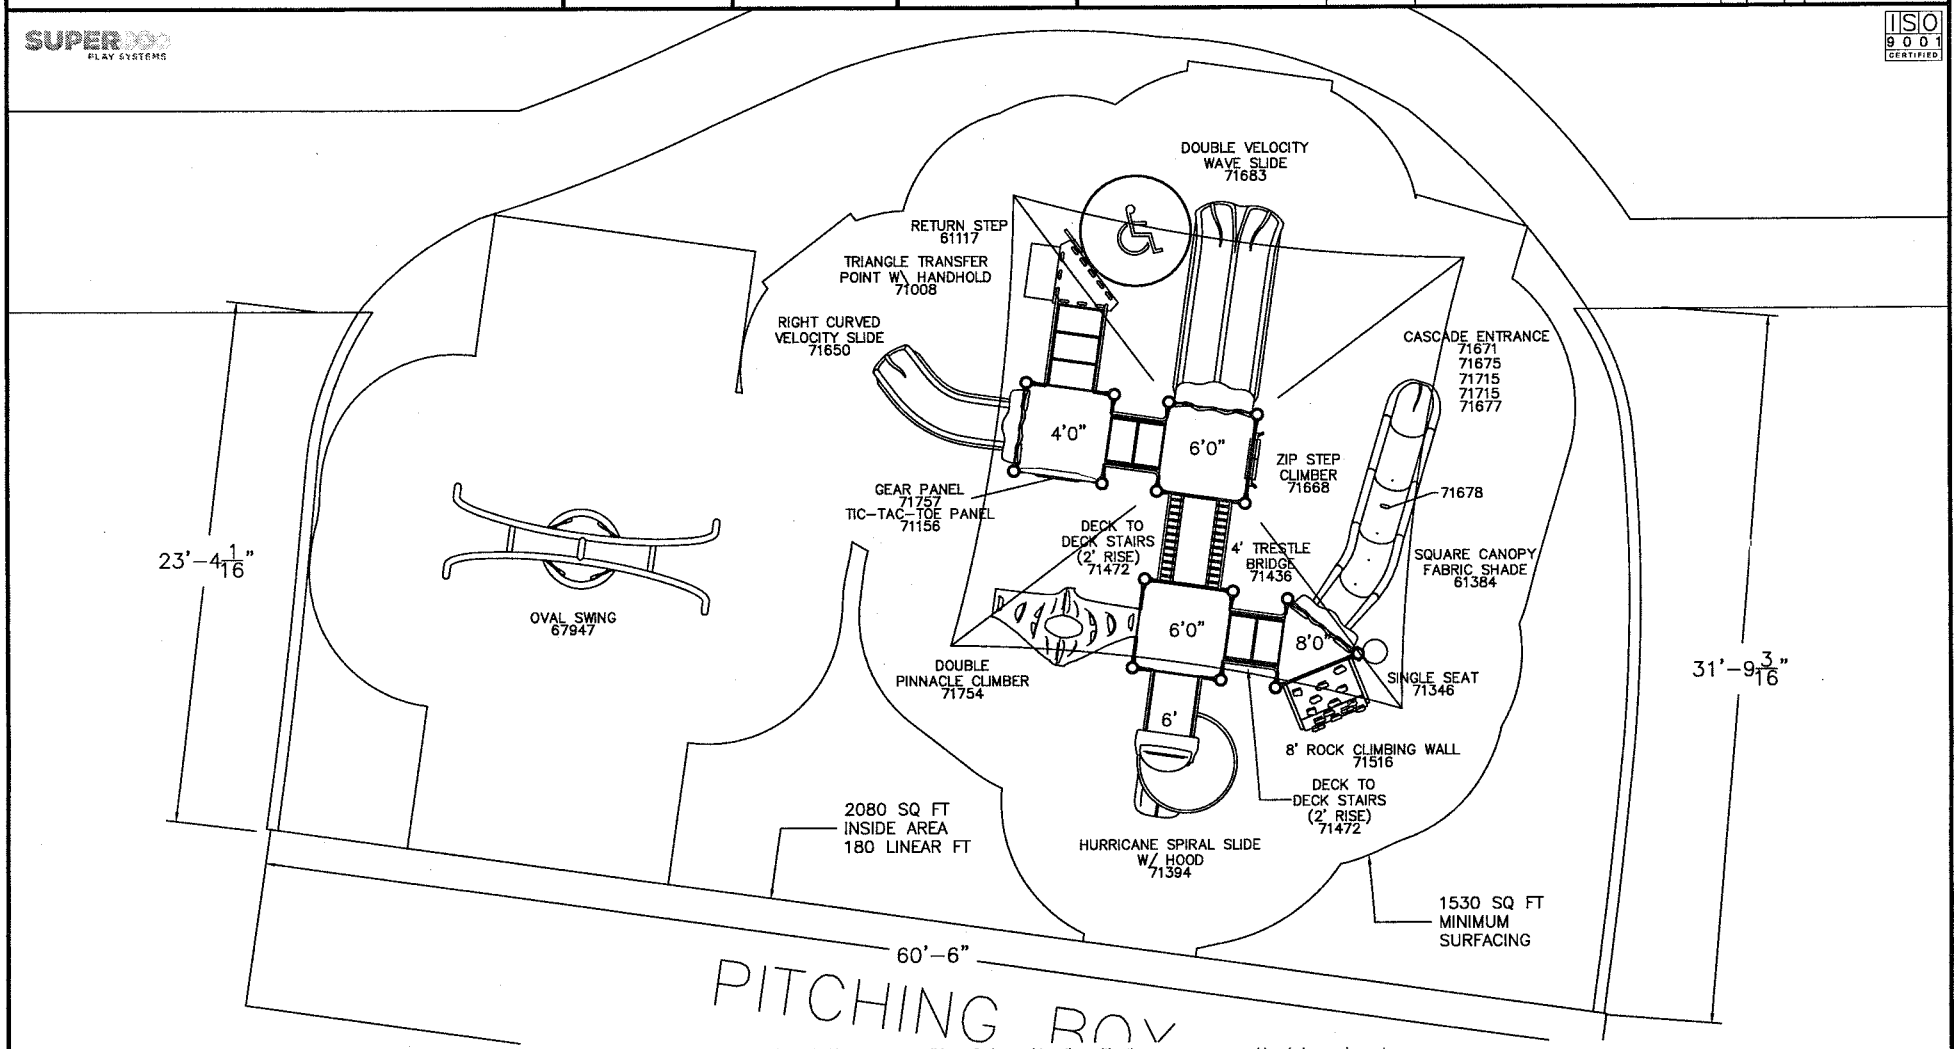

It is the manufacturer's opinion that the structure shown herein complies with current ada standards concerning accessibility if used with proper accessible surfacing and together with other necessary ground level play equipment.

IMPORTANT: Never install play equipment over hard, unresilient surfaces such as asphalt, concrete, or compacted earth. It is the owner's responsibility to ensure the "minimum area required" contains an appropriate amount of resilient material to cushion accidental falls.

Distributor	Manufacturer	Product	Discount Allowed from MSRP	Installation Discount	Catalog Provided	Current MSRP List Supplied
REP Services, (cont.)	ForeverLawn	Grass for safe-play areas	5%	Installation included in price per SF	Yes	Yes
	Vitriturf/Hanover, Inc.	Poured in place surfacing	2%	Installation included in price per SF	Yes	Yes
	Irvine Wood Recovery	Playground mulch	5%	99%	Yes	Yes
	Sof Surfaces	Tile for safe play areas	5%	33%	Yes	Yes
	Tot Turf	Poured in place surfacing	2%	Installation included in price per SF	Yes	Yes
Southern Recreation, Inc. (904) 387-4390 (904) 545-9870 (c)	Playland now: Superior Recreational	Playground equip.; park amenities; shade structures	15%	28%	Yes	Yes
	SportsPlay	Playground equip.; shade structures	10%	28%	Yes	Yes
	Jaypro	Sports equip.	10%	28%	Yes	Yes
	Kay Park	Bleachers; park amenities	10%	28%	Yes	Yes
	Webcoat	Park amenities & shade structures	10%	28%	Yes	Yes
	Ultra Play	Playground equip.	10%	28%	Yes	Yes
	Ultra Site	Pet Park equip. & Park amenities	10%	28%	Yes	Yes
	Sitescapes	Park amenities	10%	28%	Yes	Yes
	Litchfield (SSI Structures)	Park amenities	10%	28%	Yes	Yes
	Superior Shade	Shade structures	10%	28%	Yes	Yes
	Zeager Wood Carpet	Playground surfacing	10%	28%	Yes	Yes
	Murdock	Water fountains	10%	NA	Yes	Yes

Distributor	Manufacturer	Product	Discount Allowed from MSRP	Installation Discount	Catalog Provided	Current MSRP List Supplied
Southern Recreation, Inc. (cont.)	Sportable Scoreboards	Scoreboards	10%	Varies with project	Yes	Yes
Playmore West, Inc. (329) 791-2400	Playworld Systems	Playground Equip.	5%	30%	Yes	Yes
	Zeager	Playground surfacing	5%	75%	Yes	Yes
	X Grass	Synthetic turf	5%	Included	Yes	Yes
	Child Safe	Poured in place safety surface	5%	Included	Yes	Yes
	Shade Systems	Shade structures	5%	60%	Yes	Yes
	Classic Recreation	Shade structures & small RR bldgs.	5%	60%		
J Durgan Assoc., Inc. (561) 654-9708	Regal Contractors, Inc.	Installer				
	Greenfield Outdoor Fitness	Exercise equip. & h/c playground equip.	2%	-0-	Yes	Yes
	Apollo Sunguard	Shade structures	5%	-0-	Yes	Yes
	Henderson Recreation	Playground equip.	10%	-0-	Yes	Yes
	Everguard	Poured in place safety surface	-0-	-0-	No	Yes
Victor Stanley, Inc. (407) 641-0241 (407) 637-9385	Victor Stanley	Planters, trashcans, park amenities	5%	25%	Yes	Yes
Robertson Industries, Inc. (954) 882-1366	Tot Turf	Poured in place safety surface	10%	Included	Yes	Yes
	Art of Flooring	Installer				

Distributor	Manufacturer	Product	Discount Allowed from MSRP	Installation Discount	Catalog Provided	Current MSRP List Supplied
Bliss Products & Services, Inc. (904) 210-7760	ActionPlay	Safe play borders, swing parts, park amenities	5%	Priced per job	Yes	Yes
	American Mulch	Mulch	Priced per job	Priced per job	No	No
	Athletic Connection	Athletic equip.	5%	Priced per job	Yes	Yes
	Bark Park	Equip. for dog park	8%	35%	Yes	Yes
	Big Toys	Playground equip.	5%	35%	Yes	Yes
	BRP	Bleachers, park amenities	5%	Priced per job	Yes	Yes
	CemRock	Rock climbers	5%	Priced per job	No	No
	Childworks	Playground equip. & swing parts	5%	Priced per job	Yes	Yes
	Colorado Time Systems	Scoreboards	5%	Priced per job	Yes	Yes
	Compac Filtration	Equip. for water parks	5%	Priced per job	Yes	Yes
	Dero	Bicycle racks	5%	Priced per job	Yes	Yes
	Dura Play	Safety surfaces	5%	Priced per job	Yes	Yes
	DynaCushion	Safety surfaces	10%	Priced per job	No	No
	Dynamo	Sports & playground equip., rock climbing	10%	Priced per job	Yes	Yes
	Electro Mesh Scoreboard	Scoreboards	10%	Priced per job	No	No

	Elephant Play	Playground equip.	10%	35%	Yes	Yes
	Everguard	Poured in place safety surfaces	10%	Priced per job	No	No
Distributor	Manufacturer	Product	Discount Allowed from MSRP	Installation Discount	Catalog Provided	Current MSRP List Supplied
Bliss Products & Services, Inc., (cont.)	Everlast Climbing	Wall Climbers	10%	Priced per job	Yes	Yes
	Fibar	ADA playground safety surfaces	10%	Priced per job	Yes	Yes
	Forestry Resources	Mulch/Lumber	5%	Priced per job	No	No
	Forte	Plastic timbers for safe-play area	5%	Priced per job	Yes	Yes
	Gared Sports	Netting, field equip., sports equip.	10%	Priced per job	Yes	Yes
	GT Grandstands	Bleachers	10%	Priced per job	Yes	Yes
	Innovative Mulching	Mulch	10%	Priced per job	No	No
	Jayhawk Plastics	Park furnishings	10%	Priced per job	Yes	Yes
	Jaypro Sports	Indoor & outdoor sports equip.	5%	Priced per job	Yes	Yes
	Jansen Swings	Repair parts for swings	5%	Priced per job	Yes	Yes
	Kay Park	Playground equip.	5%	Priced per job	No	No
	Madrax	Bicycle racks	5%	Priced per job	Yes	Yes
	Most Dependable Fountains	Water fountains	5%	Priced per job	Yes	Yes
	Murdock Fountains	Water fountains	5%	Priced per job	Yes	Yes
	National Recreation Systems	Bleachers	5%	Priced per job	Yes	Yes

	Outback Shelters	Shelters	10%	Priced per job	Yes	Yes
	Play and Park Structures	Playground equip.	10%	35%	Yes	Yes
	Play Guard	Safety surfaces	5%	Priced per job	No	No
Distributor	Manufacturer	Product	Discount Allowed from MSRP	Installation Discount	Catalog Provided	Current MSRP List Supplied
Bliss Products & Services, Inc., (cont.)	Playmore	Playground Equip.	5%	35%	Yes	Yes
	Playsafe Surfacing	Safety surfacing	5%	Priced per job	No	No
	Playsafer	Rubber mulch & curbing	5%	Priced per job	Yes	Yes
	Pro Mats	Netting, padding, benches, equip.	5%	Priced per job	Yes	Yes
	Rubber Recycling	Recycled rubber for safe play areas	5%	Priced per job	No	No
	Sand Lock Sandbox	Sandboxes	5%	Priced per job	Yes	Yes
	Sandee Sod, Inc.	Sod	Priced per job	Priced per job	No	No
	Shade America	Shade Structures	10%	Priced per job	Yes	Yes
	Shaw Industries	Flooring/Carpet	5%	Priced per job	No	No
	Shelterscapes	Shelters(?)	5%	Priced per job	No	No
	Spectrum	ADA pool lifts & equipment	5%	Priced per job	Yes	Yes
	Spiral Court King	Court equipment	5%	Priced per job	No	No
	Spohn Ranch/Tru Ride	Skate ramps	5%	Priced per job	Yes	Yes
	Sportsplay	Playground equip., shelters, park amenities	5%	Priced per job	Yes	Yes

	Stewart Tennis Courts	Tennis Courts	Priced per Job	Priced per Job	No	No
	Structural Wood Systems	Lumber	5%	Priced per Job	No	No
	Suwannee Lumber	Lumber	5%	Priced per Job	No	No
	Tennis Unlimited	Tennis netting	5%	Priced per Job	No	No
Distributor	Manufacturer	Product	Discount Allowed from MSRP	Installation Discount	Catalog Provided	Current MSRP List Supplied
Bliss Products & Services, Inc., (cont.)	Terra Pad	Pads for fall zones	5%	Priced per Job	Yes	Yes
	Terra Soft	Poured in place safety surface	5%	Priced per Job	Yes	Yes
	Turf Evolution	Synthetic grass	5%	Priced per Job	Yes	Yes
	Ultra Play	Toddlers play equip.	5%	Priced per Job	Yes	Yes
	Ultra Site	Shade structures, bleachers, park amenities	5%	Priced per Job	Yes	Yes
	Ultra Shade	Shade structures	5%	Priced per Job	Yes	Yes
	Vortex Water Parks	Equip. for water parks	5%	Priced per Job	Yes	Yes
	Webcoat	Plastic coated park amenities	5%	Priced per Job	Yes	Yes
	Wood Mulch Products	Mulch	5%	Priced per Job	No	No
	X-Grass	Synthetic Turf	5%	Priced per Job	Yes	Yes
	Sandee Sod, Inc.	Installer				
	FunBuilders, Inc.	Installer				
	Chris Patton	Installer				

SUBJECT: PIGGYBACK CLAY COUNTY RFP #13/14-8 FOR VARIOUS EQUIPMENT & AMENITIES FOR PARKS & PLAYGROUNDS

BID #: PSC-0603-14 **OPEN DATE: 01/07/2014**

GENERAL GOVERNMENT AWARDS COMMITTEE

KIND AND BASIS OF CONTRACT: PIGGYBACK CONTRACT – INITIAL TERM OF THREE (3) YEARS BEGINNING JANUARY 29, 2014 AND ENDING FEBRUARY 11, 2017

AGENCY: PARKS, RECREATION AND COMMUNITY SERVICES DEPARTMENT

BASIS OF AWARD: PIGGYBACK

NUMBER OF BIDS INVITED: (N/A) **NUMBER RECEIVED:** (N/A) **OTHER** (N/A)

SUMMARY OF BIDS AND RECOMMENDED ACTIONS:
Recommend approval to award to the below vendors under this piggyback contract, for equipment and amenities for parks and playgrounds. The total revised maximum indebtedness not to exceed $1,969,524.28.

Southern Recreation, Inc. – Home Gardens Park - $22,032.00
Musco Sports Lighting, LLC. – Ed Austin Regional Park - $48,000.00
M. Gay ~~Contractors~~ Constructors, Inc. – Ed Austin Regional Park - $18,600.00

Funding for this award to be encumbered by account PRCP31RF5720-06505-PR0242-01 for $22,032.00 and various CIP accounts, to be executed by Contract amendment through the Office of General Counsel.

ATTACHMENTS: Recommendation Memo; Vendor Quotes; Original RFP Discounts; Previous Awards

ANALYST: CHELSEY RENFROE **RESPECTFULLY SUBMITTED** GREGORY PEASE, CHIEF PROCUREMENT DIVISION

CONCURRENCE BY: Daryl Joseph, Director of Parks, Recreation & Community Services

(ALL AWARD ACTIONS SUBJECT TO LAWFULLY APPROPRIATED FUNDS)
ACTION OF GGAC COMMITTEE ON RECOMMENDATIONS ABOVE
MEMBERS APPROVING 3 MEMBERS DISAPPROVING Ø DATE: 4/06/17

OTHER:

ACTION OF AWARDING AUTHORITY DATE 4/06/17

APPROVED DISAPPROVED

OTHER

SIGNATURE OF AUTHENTICATION

Sam E. Mousa
Chief Administrative Officer
For: Mayor Lenny Curry
Under Authority of:
Executive Order No. 2015-05

SUBJECT: PIGGYBACK CLAY COUNTY RFP #13/14-8 FOR VARIOUS EQUIPMENT & AMENITIES FOR PARKS & PLAYGROUNDS

BID #: PSC-0603-14 OPEN DATE: 01/07/2014

GENERAL GOVERNMENT AWARDS COMMITTEE

KIND AND BASIS OF CONTRACT: PIGGYBACK CONTRACT – INITIAL TERM OF THREE (3) YEARS BEGINNING JANUARY 29, 2014 AND ENDING FEBRUARY 11, 2017

AGENCY: PARKS, RECREATION AND COMMUNITY SERVICES DEPARTMENT

BASIS OF AWARD: PIGGYBACK

NUMBER OF BIDS INVITED: (N/A) NUMBER RECEIVED: (N/A) OTHER (N/A)

SUMMARY OF BIDS AND RECOMMENDED ACTIONS:
Recommend approval to award Game Time, Inc., in the amount of $32,600.94, for the purchase and installation of playground equipment at Palmetto Leaves Park. The total revised maximum indebtedness not to exceed $1,880,892.28.

Funding for this award to be encumbered by account, RPCP363F5720-06505-PR0597-01to be executed by Contract amendment through the Office of General Counsel.

ATTACHMENTS: Recommendation Memo; Vendor Quote; Original RFP Discounts; Previous Awards

ANALYST: _____ RESPECTFULLY SUBMITTED _____
CHELSEY RENFROE GREGORY PEASE, CHIEF PROCUREMENT DIVISION

CONCURRENCE BY: Daryl Joseph, Director of Parks, Recreation & Community Services

(ALL AWARD ACTIONS SUBJECT TO LAWFULLY APPROPRIATED FUNDS)
ACTION OF GGAC COMMITTEE ON RECOMMENDATIONS ABOVE
MEMBERS APPROVING 3 MEMBERS DISAPPROVING Ø DATE: 3/16/17

_____ _____ OTHER: _____
_____ _____
_____ _____

ACTION OF AWARDING AUTHORITY DATE 3/16/17
APPROVED _____ DISAPPROVED _____
OTHER _____

SIGNATURE OF AUTHENTICATION _____
~~Sam E. Mouss~~
Chief Administrative Officer
for Mayor Lenny Curry
Under Authority of:
Executive Order No. 2015-05

SUBJECT: PIGGYBACK CLAY COUNTY RFP #13/14-8 FOR VARIOUS EQUIPMENT & AMENITIES FOR PARKS & PLAYGROUNDS

BID #: PSC-0603-14 OPEN DATE: 01/07/2014

GENERAL GOVERNMENT AWARDS COMMITTEE

KIND AND BASIS OF CONTRACT: PIGGYBACK CONTRACT – INITIAL TERM OF THREE (3) YEARS BEGINNING JANUARY 29, 2014 AND ENDING FEBRUARY 11, 2017

AGENCY: PARKS, RECREATION AND COMMUNITY SERVICES DEPARTMENT

BASIS OF AWARD: PIGGYBACK

NUMBER OF BIDS INVITED: (N/A) NUMBER RECEIVED: (N/A) OTHER (N/A)

SUMMARY OF BIDS AND RECOMMENDED ACTIONS:
Recommend approval to amend award dated 2/16/2017 to clarify that the extension is to utilize various vendors awarded under Clay County RFP #13/14-8.

Recommend approval to award Southern Recreation, Inc., in the amount of $68,085.00, for the purchase and installation of playground equipment at Gamewell Tot Lot. The total revised maximum indebtedness not to exceed $1,848,291.34.

Funding for this award to be encumbered by account, PRCP363F5790-06505-PR0547-01to be executed by Contract amendment through the Office of General Counsel.

ATTACHMENTS: Recommendation Memo; Vendor Quote; Clay County Renewal; Original RFP Discounts; Previous Awards

ANALYST: _____ RESPECTFULLY SUBMITTED _____
CHELSEY RENFROE GREGORY PEASE, CHIEF PROCUREMENT DIVISION

CONCURRENCE BY: Daryl Joseph, Director of Parks, Recreation & Community Services

(ALL AWARD ACTIONS SUBJECT TO LAWFULLY APPROPRIATED FUNDS)
ACTION OF GGAC COMMITTEE ON RECOMMENDATIONS ABOVE
MEMBERS APPROVING 3 MEMBERS DISAPPROVING Ø DATE: 3/09/17

_____ _____ OTHER: _____
_____ _____
_____ _____

ACTION OF AWARDING AUTHORITY DATE 3/09/17
APPROVED _____ DISAPPROVED _____
OTHER _____
SIGNATURE OF AUTHENTICATION _____

Sam E. Mousa
Chief Administrative Officer
For: Mayor Lenny Curry
Under Authority of:
Executive Order No. 2015-05

SUBJECT: PIGGYBACK CLAY COUNTY RFP #13/14-8 FOR VARIOUS EQUIPMENT & AMENITIES FOR PARKS & PLAYGROUNDS

BID #: PSC-0603-14 OPEN DATE: 01/07/2014

GENERAL GOVERNMENT AWARDS COMMITTEE

KIND AND BASIS OF CONTRACT: PIGGYBACK CONTRACT – INITIAL TERM OF THREE (3) YEARS BEGINNING JANUARY 29, 2014 AND ENDING FEBRUARY 11, 2017

AGENCY: PARKS, RECREATION AND COMMUNITY SERVICES DEPARTMENT

BASIS OF AWARD: PIGGYBACK

NUMBER OF BIDS INVITED: (N/A) NUMBER RECEIVED: (N/A) OTHER (N/A)

SUMMARY OF BIDS AND RECOMMENDED ACTIONS:

Recommend approval to ratify award from February 12, 2017 through date of award. (amend)

Recommend approval to extend ~~the~~ subject piggyback contract ~~with Bliss Products and Services, Inc.,~~ to various vendors from date of award through February 11, 2018, in accordance with Clay County's contract renewal.

Recommend approval to award Bliss Products and Services, Inc., in the amount of $99,950.00, for the purchase and installation of playground equipment at Losco Park Splash Pad. The total revised maximum indebtedness not to exceed $1,760,196.34.

Funding for this award to be encumbered by account RPCP363F5720-06505-PR0597-01, to be executed by Contract through the Office of General Counsel.

ATTACHMENTS: Recommendation Memo; Vendor Quote; Clay County Renewal; Original RFP Discounts; Previous Awards

ANALYST: _____ CHELSEY RENFROE

RESPECTFULLY SUBMITTED _____ GREGORY PEASE, CHIEF PROCUREMENT DIVISION

CONCURRENCE BY: Daryl Joseph, Director of Parks, Recreation & Community Services

(ALL AWARD ACTIONS SUBJECT TO LAWFULLY APPROPRIATED FUNDS)

ACTION OF GGAC COMMITTEE ON RECOMMENDATIONS ABOVE

MEMBERS APPROVING 3 MEMBERS DISAPPROVING Ø DATE: 2/16/17

_____ _____ OTHER: _____

_____ _____

_____ _____

ACTION OF AWARDING AUTHORITY DATE 2/16/17

MK APPROVED _____ DISAPPROVED _____

OTHER _____

SIGNATURE OF AUTHENTICATION _____ Sam E. Mousa
Chief Administrative Officer
For: Mayor Lenny Curry
Under Authority of:
Executive Order No. 2015-05

SUBJECT: PIGGYBACK CLAY COUNTY RFP #13/14-8 FOR VARIOUS EQUIPMENT & AMENITIES FOR PARKS & PLAYGROUNDS

BID #: PSC-0603-14 OPEN DATE: 01/07/2014

GENERAL GOVERNMENT AWARDS COMMITTEE

KIND AND BASIS OF CONTRACT: PIGGYBACK CONTRACT - INITIAL TERM OF THREE (3) YEARS BEGINNING JANUARY 29, 2014 AND ENDING FEBRUARY 11, 2017

AGENCY: PARKS, RECREATION AND COMMUNITY SERVICES DEPARTMENT

BASIS OF AWARD: PIGGYBACK

NUMBER OF BIDS INVITED: (N/A) NUMBER RECEIVED: (N/A) OTHER (N/A)

SUMMARY OF BIDS AND RECOMMENDED ACTIONS:
Subject bid was awarded 7/10/2014 to piggyback Clay County RFP #13/14-8 Various Equipment & Amenities awarded to various vendors.

Recommend approval to rescind award dated 8/04/2016 to Game Time, Inc., to resubmit as part of this recommendation.

Accordingly, recommend approval to award vendors under this contract as follows: Game Time Inc. in the amount of $139,161.13 for Hanna Park (playground) and $26,288.38 for Hanna Park (Zip Line); Bliss Products in the amount of $99,409.60 for Maxville Park and to Southern Recreation, Inc. in the amount of $85,574.96 for Ray Greene Park, $95,258.15 for Touchton Road Park (playground) and $44,594.15 for Touchton Road Park (adult fitness), for the purchase and installation of playground equipment. The total award not-to-exceed $492,286.35 and the total revised maximum indebtedness not to exceed $1,660,246.34.

Funding for this award to be encumbered by various accounts, to be executed by Contract through the Office of General Counsel.

ATTACHMENTS: Recommendation Memo; Vendor Quotes; Certificates of Liability; Original RFP Discounts; Previous Awards

ANALYST: _____ CHELSEY RENFROE RESPECTFULLY SUBMITTED _____ GREGORY PEASE, CHIEF PROCUREMENT DIVISION

CONCURRENCE BY: Daryl Joseph, Director of Parks, Recreation & Community Services

(ALL AWARD ACTIONS SUBJECT TO LAWFULLY APPROPRIATED FUNDS)
ACTION OF GGAC COMMITTEE ON RECOMMENDATIONS ABOVE

MEMBERS APPROVING 3 MEMBERS DISAPPROVING Ø DATE: 9/8/16

_____ OTHER: _____

ACTION OF AWARDING AUTHORITY DATE _____

APPROVED ✓ DISAPPROVED _____

OTHER _____

SIGNATURE OF AUTHENTICATION _____

SUBJECT: PIGGYBACK CLAY COUNTY RFP #13/14-8 FOR VARIOUS EQUIPMENT & AMENITIES FOR PARKS & PLAYGROUNDS

BID #: PSC-0603-14 OPEN DATE: 01/07/2014

GENERAL GOVERNMENT AWARDS COMMITTEE

KIND AND BASIS OF CONTRACT: PIGGYBACK CONTRACT – INITIAL TERM OF THREE (3) YEARS BEGINNING JANUARY 29, 2014 AND ENDING FEBRUARY 11, 2017

AGENCY: PARKS, RECREATION AND COMMUNITY SERVICES DEPARTMENT

BASIS OF AWARD: PIGGYBACK

NUMBER OF BIDS INVITED: (N/A) NUMBER RECEIVED (N/A) OTHER (N/A)

SUMMARY OF BIDS AND RECOMMENDED ACTIONS:
Subject bid was awarded 7/10/2014 to piggyback Clay County RFP #13/14-8 Various Equipment & Amenities awarded to various vendors.

Recommend approval of award to Game Time, Inc. under this piggyback contract in the amount of $139,161.13, for the purchase of playground equipment for Hanna Park. The total revised maximum indebtedness not to exceed $1,327,121.12.

Funding for this award to be encumbered by account RPWF102-06429, to be executed by Contract through the Office of General Counsel.

ATTACHMENTS: Recommendation Memo; Vendor Quote; Certificate of Liability

ANALYST: _____ CHELSEY RENFROE RESPECTFULLY SUBMITTED _____ GREGORY PEASE, CHIEF PROCUREMENT DIVISION

CONCURRENCE BY: Daryl Joseph, Director of Parks, Recreation & Community Services

(ALL AWARD ACTIONS SUBJECT TO LAWFULLY APPROPRIATED FUNDS)
ACTION OF GGAC COMMITTEE ON RECOMMENDATIONS ABOVE

MEMBERS APPROVING 3 MEMBERS DISAPPROVING Ø DATE: 8-4-16

_____ OTHER: _____

_____

_____

ACTION OF AWARDING AUTHORITY DATE _____

APPROVED _____ DISAPPROVED _____

OTHER _____

SIGNATURE OF AUTHENTICATION _____

SUBJECT: Sports Lighting

BID NO.: PSC-0592-14 OPEN DATE: 01/07/2014

GENERAL GOVERNMENT AWARDS COMMITTEE

KIND AND BASIS OF CONTRACT: Piggyback Contract – Initial term of three (3) years beginning January 29, 2014 and ending February 11, 2017.

FOR: Parks, Recreation and Community Services

BASIS OF AWARD: Piggyback

NUMBER OF BIDS INVITED: NA NUMBER OF BIDS RECEIVED: NA OTHER: NA

SUMMARY OF BIDS AND RECOMMENDED ACTIONS: Recommend approval to piggyback the Clay County RFP #13/14-8 Various Equipment & Amenities for Parks & Playgrounds contract awarded to various vendors in accordance with Exhibit A, for the service period from date of this award thru February 11, 2017.

Recommend approval to award vendors under this contract as follows: Musco Sports Lighting, LLC in the amount of $269,950.00 for the purchase of Sport Field Lighting (Exhibit B) and to M. Gay Constructors in the amount of $185,250.00 for installation of Sport Field Lighting (Exhibit C) for Leonard Abbess Park and Bob Hayes Soccer Complex for a total award not to exceed $455,200.00, to be executed by formal contract thru the Office of General Counsel.

This award is subject to appropriation by the City in the fiscal year beginning October 1, 2014. No funds have been appropriated to date. The City has no obligation for payment and work hereunder is not authorized unless funds are appropriated for the work herein. A written notification will be provided in the event that funds are appropriated.

Account Code:	RPCP327F5720 06505 PR0469 05	$99,950.00
	RPCP328F5720 069505 PR0058 02	$148,000.00
	RCCP329F5720 069505 PR0587 01	$22,000.00
	RPCP327F5720 06505 PR0469 05	$83,250.00
	RPCP328F5720 069505 PR0058 02	$102,000.00

Attachments: Recommendation Memos, M. Gay and Musco Lighting quotes, Risk Management Insurance Approval, Clay County Florida Minutes, Clay County Florida RFP, M. Gay and Musco Lighting RFP responses, Account Summary Inquiries.

Purchasing Analyst Amy Cole Respectfully Submitted Gregory Pease, Chief Procurement Division

CONCURRENCE BY: Daryl Joseph, Interim Director Parks, Recreation, and Community Services

(ALL AWARD ACTIONS SUBJECT TO LAWFULLY APPROPRIATED FUNDS)
ACTION OF GGAC COMMITTEE ON RECOMMENDATIONS ABOVE

MEMBERS APPROVING 3 MEMBERS DISAPPROVING _____ DATE 09/10/14

OTHER _____

ACTION OF AWARDING AUTHORITY DATE _____

APPROVED: ✓ DISAPPROVED: _____

OTHER: _____

SIGNATURE OF AUTHENTICATION: _____

Karen Bowling
Chief Administrative Officer
For: Mayor Alvin Brown
Under Authority of:
Executive Order No. 2013-04